

# Slot Loading Effects on 5G mm-wave Rectangular Patch Antenna

Aafreen Khan<sup>1</sup>, Anwar Ahmad<sup>2</sup>

<sup>1,2</sup>Department of Electronics and Communication Engineering, Jamia Millia Islamia, New Delhi, India

Received Date: 12 December 2023

Revised Date: 16 January 2024

Accepted Date: 13 February 2024

**Abstract:** In the proposed article the slot loading effects has been analysed by loading the slot on the different position of rectangular patch and the performance parameter has been shown for the proposed structure. Loading the slots on the rectangular patch improving the Antenna Gain, RL and the Bandwidth parameters. The antenna has been designed on the HFSS software.

**Keywords:** mm-wave, 5G, Slot, Dual-Band, Defected Ground Structure (DGS), Array.

## I. INTRODUCTION

Performance parameter enhancement for an antenna is a necessity to contribute a good structure in modern technology. Enhancement in the antenna output characteristics can be attained by various methods Slot loading is one of them .5G antennas can be used for various applications. Also antenna design at mm-wave is a good area of interest as 5G covers this frequency band and provides high speed but because of some disadvantageous features the enhanced antenna characteristics should be achieved. In this article the slot loading method has been used to improve the antenna performance parameter as it is easy to implement and provides various beneficial output parameters.

## II. LITERATURE REVIEW

Slot loading is to patch out slot from the patch. Various kind of slots can be etched out in [1] U-shaped slot has been design on the patch and antenna is useful for S, C and X band applications. In [2] L slots has been used and the multiband characteristics has been achieved. In [3] a circular slot microstrip patch antenna has been proposed with the CP polarisation characteristics. In [4] Patch antenna for 5G applications has been proposed with the slot loaded method and the triple band has been achieved. In [5] star shape slot along with six circular slots are etched and the wideband characteristics has been attained. In [6] H shape slot has been loaded and the triple resonating bands has been achieved. In [7] the MPA with H shape slot is designed to enhance the antenna characteristics for 5G WLAN applications. In [8] the H shape slot has been design for mm-wave frequency range and the dual band frequencies has been achieved. A cslot of diamond shape has been implemented on circular patch of the antenna in [9] and the broadband characteristics has been achieved. In [10] L, T, U and F shape slots are used on patch antenna and also the performance parameters are compared by choosing different substrate material. The parameters of the designed antenna are stated in Table 1.

## III. ANTENNA DESIGN

The rectangular patch antenna has been designed on the  $5.764 \times 6.635 \text{ mm}^2$  ground plane. The substrate is chosen as Rogers RT-duroide 5880 of relative permittivity 2.2 and relative permeability 1. A slot has been loaded on the different position of the rectangular patch and the performance characteristics has been analysed. Also the parameters are given in the Table 1.

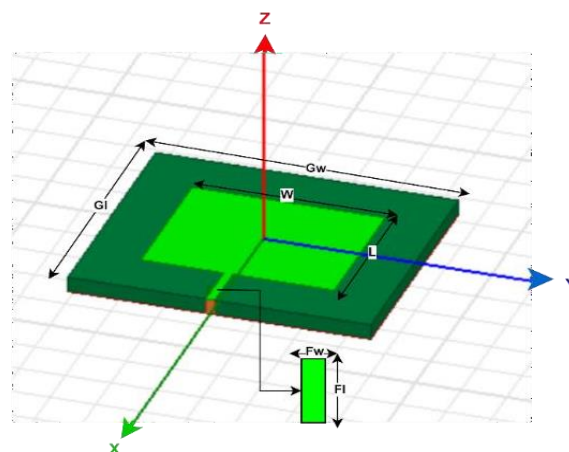


Figure 1: Designed Rectangle Patch Antenna Isometric View




**Table 1: Designed Antenna Parameters**

Parameter	Size(mm)	Parameter	Size(mm)
W	4.235	LS3	2.7
L	3.364	WS3	0.2
Gw	6.635	LS4	0.25
Gl	5.764	WS4	2.12
LS1	2.12	Fw	0.2
WS1	0.8	Fl	1.202
LS2	1	WS2	1


**IV. RESULTS**

**A. Slots**

Slot cutting on the patch of the antenna is the technique to improve antenna performance characteristics various literatures [1-10] have been done on it. Slots on the patch can improve the antenna gain, bandwidth and return loss parameter. In Figure the slots have been represented for different performance enhancement. Slots on the patch improve the Antenna performance characteristics by changing the current distribution plot. Slots can be any shape or size. In the Figure 2 (a),(b),(c),(d). The Four slots have been etched out at the different position of the patch and the antenna performance parameter has been represented. In the Figure 4 due to slot SL1 the antenna is resonating on two resonating frequencies with the slight shifting in the fundamental frequency the two frequencies are 27.3103GHz (26.916-27.832) GHz and 52.6897 GHz (52.235-53.109) GHz. and the RL values are - 24.896GHz and -10.479GHz and in the gain plot for SL1 the maximum gain attained is 7.931dB at 28.2759 GHz. In Figure 5 SL2 due to slot 2 also the two resonating bands are achieved at the two bands 27.3103GHz (26.864-27.803GHz) and 52.275GHz (51.708-53.0101) GHz with the good RL value -33.7446dB and -12.5343dB respectively with the maximum gain of 7.969dBi at 28.275GHz. In the SL3 also two resonating frequencies 28.137GHz(27.6126- 28.548)GHz,51.724GHz(50.4-62-53.130)GHz and the RL value -18.964GHz,-14.727GHz respectively and the maximum gain is 7.994dBi at the 28.827GHz is shown in Figure 6 .While the slot SL4 open ended slot providing the single band 55.586(51.986-57.397)GHz with the RL value - 19.6267dB and maximum gain 7.4415dBi.wide band frequency range is given in Figure 7 So, the different positing of the slot on the patch of the antenna is improving the antenna characteristic

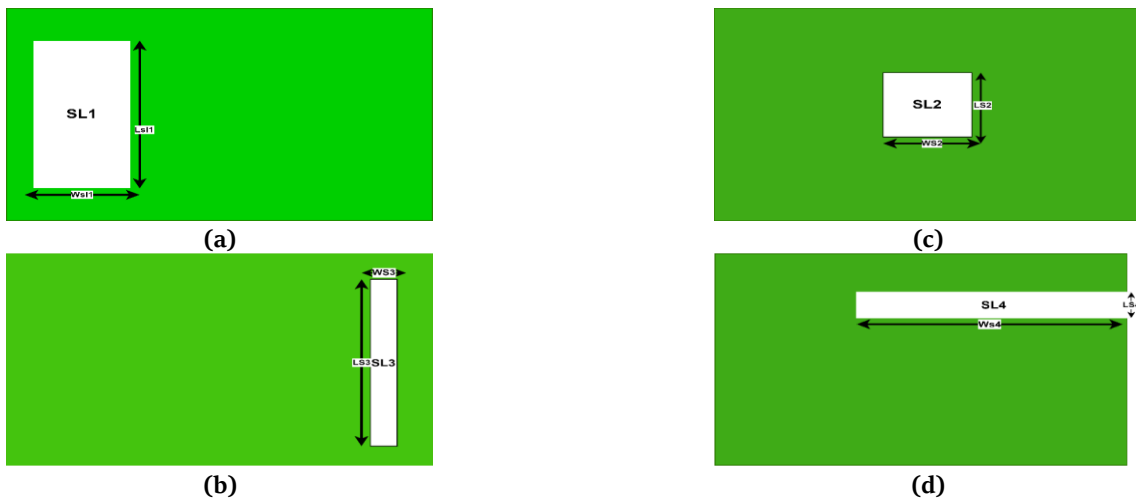

**Figure 2: Rectangle Patch (a) with slot SL1 (b) with slot SL2 (c) with slot SL3 (d) with slot SL4**

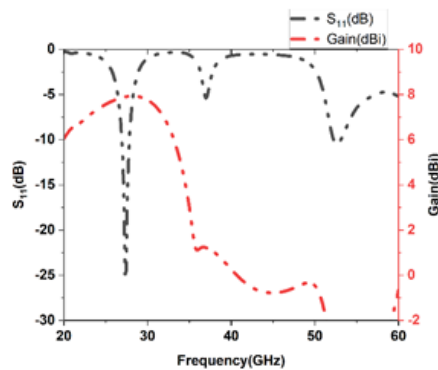

**Figure 3: Return Loss and Gain V/s Frequency plot of Rectangular Patch antenna**

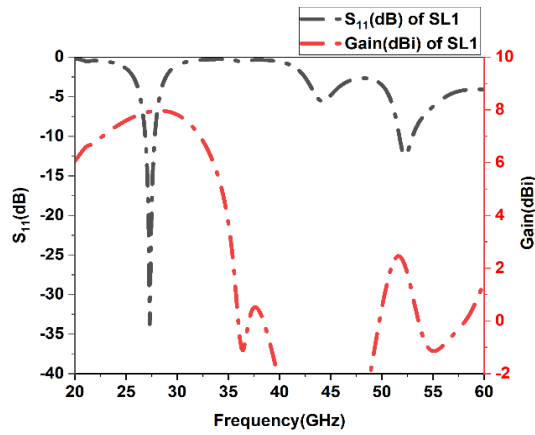


Figure 4: Return Loss and Gain V/s Frequency plot of Rectangular Patch with slot SL1

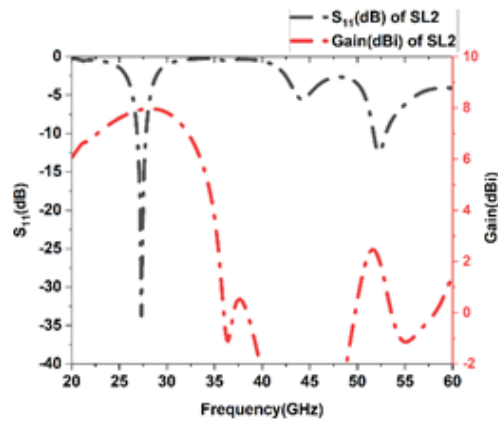


Figure 5: Return Loss and Gain V/s Frequency plot of Rectangular Patch with with slot SL2

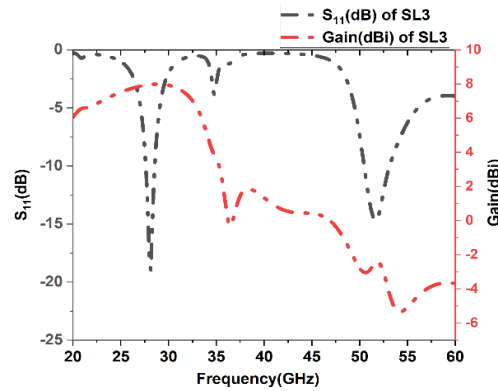


Figure 6: Return Loss and Gain V/s Frequency plot of Rectangular Patch with with slot SL3

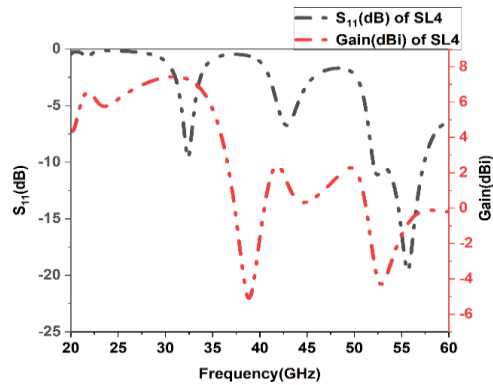


Figure 7: The Different Positing of the Slot on the Patch of the Antenna

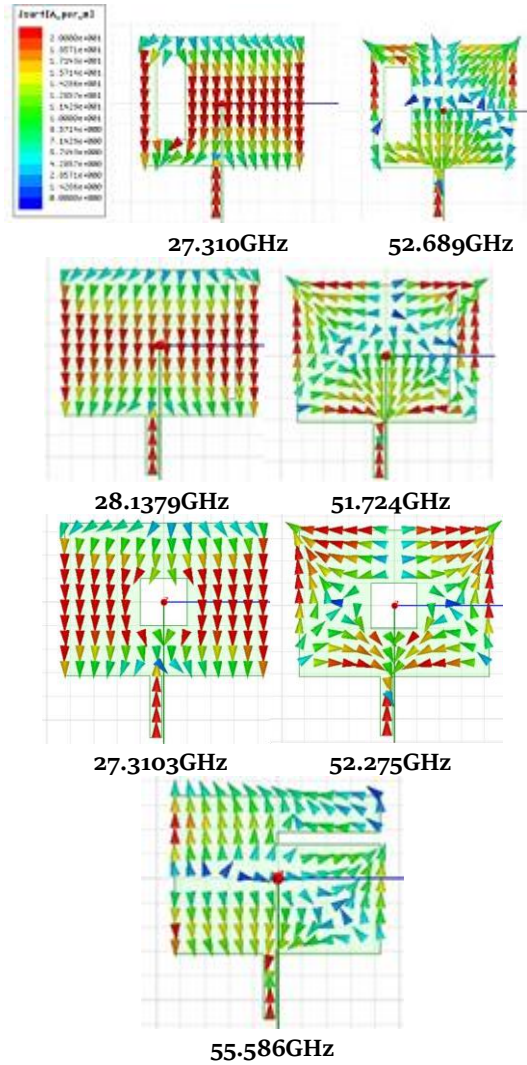


Figure 8: Current Distribution plot at (a) 27.310GHz (b) 52.689GHz (c) 28.137GHz (d) 51.724GHz (e) 27.310GHz (f) 52.275GHz (g) 55.586 GHz

The Current distribution plot at resonating frequencies for different slots are given in Figure 8 and the RL, Bandwidth, Gain characteristics of the proposed antenna with slot structures is given in Table II.

Table 2: Characteristics of the Proposed Antenna with Slot Structures

Slots	RL	Gain	Bandwidth
SL1	-24.896 GHz and -10.479 GHz	7.931d B	27.3103GHz(26.916 - 27.832)GHz and 52.6897 GHz(52.235 - 53.109)GHz
SL2	-33.7446 dB and -12.5343 dB	7.969 d Bi	27.3103GHz(26.864 - 27.803GHz) and 52.275GHz(51.708- 53.0101)GHz
SL3	- 18.964 GHz,- 14.727 GHz	7.994d Bi	28.137GHz(27.6126 - 28.548)GHz,51.724G Hz(50.462- 53.130)GH
SL4	- 19.6267 dB	7.4415 dBi	55.586(51.986 - 57.397)GHz

### V. CONCLUSION

In the designed structure a rectangular patch slot antenna has been designed for 5G applications the slot loading effects on the different position of rectangular patch has been analysed .the four slots S1, S2, S3, S4 are loaded on the rectangular patch and the effects on the different characteristics like gain, Bandwidth and Return loss has been analysed. The proposed antenna structure is a good design and resonating on the 5G mm-wave bands.

### VI. REFERENCES

[1] Chandra Bhan1 , Ajay Kumar Dwivediz , Brijesh Mishra3 , Anil Kumar, Quad Bands U-shaped Slot Loaded Probe Fed Microstrip

- Patch Antenna, 2015 Second International Conference on Advances in Computing and Communication Engineering, IEEE, 2015.
- [2] Mohamed A., Islam Md. Rafiqul, Sarah Yasmin and K. Badron, "Design of a Quintuple Band Microstrip Patch Antenna Using Multiple L-Slots International Conference on Computer & Communication Engineering, IEEE, 2016.
  - [3] Won-Sang Yoon, Sang-Min Han<sup>1</sup>, Seongmin Pyo, Jung-Woo Baik, Young-Sik Kim, A Polarization Switchable Microstrip Patch Antenna With A Circular Slot, IEEE 2008.
  - [4] Erfeng Li<sup>\*</sup>, Xue Jun Li<sup>\*</sup>, and Qing Zhao<sup>†</sup> A Design of Ink-Printable Triband Slot Microstrip Patch Antenna for 5G Applications, 3<sup>rd</sup> Australian Microwave Symposium, Sydney, Australia, 11-13 February 2020. IEEE.
  - [5] Som Pal Gangwar, Kapil Gangwar, Arun Kumar, A Compact Modified Star shape Microstrip Patch Antenna for Wideband Application, 2018 3<sup>rd</sup> International Conference on Microwave and Photonics (ICMAP 2018), 9-11 February, 2018, IEEE.
  - [6] Omar Noori<sup>1</sup>, Jalel Chebil<sup>1</sup>, Sheraz Khan<sup>1</sup>, Mohamed Hadi Habaeb<sup>1</sup>, Md. Rafiqul Islam<sup>1</sup> and Rashid A. Saeed, Design and Analysis of Triple-Band Microstrip Patch Antenna with h-shaped Slots, International Conference on Computer and Communication Engineering (ICCCE 2012), 3-5 July 2012, Kuala Lumpur, Malaysia, 2012,
  - [7] Abhishek Madankar, Vijay Chakole, Sachin Khade, H-slot Microstrip Patch Antenna for 5G WLAN Application, IEEE Xplore Part Number: CFP20M19-ART; ISBN: 978-1-7281-7089-3, IEEE 2020.
  - [8] Kifayatullah Bangash, M. Mahmood Ali, Husnul Maab, Rayyan Ali Shaukat, Effect of Embedding H-Shaped Slot on the Characteristics of Millimeter Wave Microstrip Patch Antenna for 5G Applications, 2019 International Conference on Computing, Mathematics and Engineering Technologies - iCoMET 2019.
  - [9] Garima, D. Bhatnagar, V.K. Saxena and J.S. Saini, Broadband Circular Patch Microstrip Antenna with Diamond Shape Slot for Space Communication, 2009 International Conference on Emerging Trends in Electronic and Photonic Devices & Systems (ELECTRO-2009) IEEE.
  - [10] Buket Kul, Gamze Kirman, Pakize Ergül, Zeynep Banaz Kartal, Taha Imeci, L, U, T and F-Shaped Slots in Patch Antenna, 2017 International Applied Computational Electromagnetics Society Symposium - Italy (ACES).